


MO31-00087-A012



VERT/HOR BOARD (MT/QJ)

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
RESISTORS			CAPACITORS (CONT.)		
R301	203X6500-628	820 Ohm, $\pm$ 5%, 1/8W Carbon	C313	203X0025-087	47 uF, 50V Electrolytic
R302	203X6500-902	12k Ohm, $\pm$ 5%, 1/8W Carbon	C315	203X0015-082	10 uF, 25V Electrolytic
R303	203X6500-927	15k Ohm, $\pm$ 5%, 1/8W Carbon	C316	203X1100-220	3300 uF, 50V, $\pm$ 10% Mylar
R304	203X6500-886	10k Ohm, $\pm$ 5%, 1/8W Carbon	C317	202X8000-616	100 pF, 50V, $\pm$ 10% Ceramic
R305	203X6501-241	330k Ohm, $\pm$ 5%, 1/8W Carbon	C351	202X7000-281	1500 pF, 50V, $\pm$ 10% Ceramic
R306	203X6500-645	1k Ohm, $\pm$ 5%, 1/8W Carbon	C352	202X7000-247	1000 pF, 50V, $\pm$ 10% Ceramic
R307	203X6500-689	1.5k Ohm, $\pm$ 5%, 1/8W Carbon	C353	203X1100-573	0.022 uF, 50V, $\pm$ 10% Mylar
R309	203X6500-724	2.2k Ohm, $\pm$ 5%, 1/8W Carbon	C355	203X1100-858	0.1 uF, 50V, $\pm$ 10% Mylar
R310	203X6501-285	470k Ohm, $\pm$ 5%, 1/8W Carbon	C356	203X0015-105	4.7 uF, 25V Electrolytic
R311	203X6501-065	56k Ohm, $\pm$ 5%, 1/8W Carbon	C357	203X1201-013	0.015 uF, 200V $\pm$ 10% PP
R312	203X6501-126	100k Ohm, $\pm$ 5%, 1/8W Carbon	C358	203X1201-034	0.018 uF, 200V, $\pm$ 10% PP
R313	203X6001-326	10k Ohm, $\pm$ 5%, 1/8W Carbon	C359	203X0040-013	4.7 uF, 160V Electrolytic
R314	203X6501-044	47k Ohm, $\pm$ 5%, 1/8W Carbon	C360	202X7000-482	0.01 uF, 50V, $\pm$ 10% Ceramic
R315	203X6500-628	820 Ohm, $\pm$ 5%, 1/8W Carbon	C361	203X1100-509	0.015 uF, 50V, $\pm$ 10% Mylar
R316	203X6500-420	120 Ohm, $\pm$ 5%, 1/8W Carbon	C362	203X0025-058	10 uF, 50V Electrolytic
R317	203X6206-441	2.2 Ohm, $\pm$ 5%, 1/2W Carbon	C363	203X1205-487	0.01 uF, 630V, $\pm$ 10% PP
R319	203X6500-169	100 Ohm, $\pm$ 5%, 1/8W Carbon	C364	202X7000-482	0.01 uF, 50V, $\pm$ 10% Ceramic
R320	203X6500-927	15k Ohm, $\pm$ 5%, 1/8W Carbon			
R321	203X6700-509	560 Ohm, $\pm$ 5%, 1/2W Carbon			
R322	203X9100-121	22 Ohm, $\pm$ 5%, 2W Carbon			
R323	203X6500-689	1.5K Ohm, $\pm$ 5%, 1/8W Carbon			
R324	203X6500-988	27k Ohm, $\pm$ 5%, 1/8W Carbon			
R325	203X6500-326	47 Ohm, $\pm$ 5%, 1/8W Carbon	TR301	200X4082-614	Transistor, 2SA826Q
R328	203X6500-628	820 Ohm, $\pm$ 5%, 1/8W Carbon	TR302	200X3174-006	Transistor, 2SC1740Q
R330	203X6500-886	10k Ohm, $\pm$ 5%, 1/8W Carbon	TR303	200X3174-006	Transistor, 2SA1740Q
R331	203X6501-209	220k Ohm, $\pm$ 5%, 1/8W Carbon	TR304	200X3174-006	Transistor, 2SC1740Q
R351	203X6500-724	2.2k Ohm, $\pm$ 5%, 1/8W Carbon	TR305	200X4049-081	Transistor, 2SA490YLBGLI
R352	203X6500-927	15k Ohm, $\pm$ 5%, 1/8W Carbon	TR306	200X3162-538	Transistor, 2SC1625YLBGLI
R353	203X6500-944	18k Ohm, $\pm$ 5%, 1/8W Carbon	TR307	200X3174-014	Transistor, 2SC1740R
R354	203X6500-783	3.9k Ohm, $\pm$ 5%, 1/8W Carbon	TR308	200X3174-006	Transistor, 2SC1740Q
R355	203X6500-902	12k Ohm, $\pm$ 5%, 1/8W Carbon	TR351	200X4085-415	Transistor, 2SA854Q
R356	203X6500-561	470 Ohm, $\pm$ 5%, 1/8W Carbon	TR352	200X3172-208	Transistor, 2SC1722BKS
R357	203X6500-724	2.2k Ohm, $\pm$ 5%, 1/8W Carbon	TR353	200X3174-006	Transistor, 2SC1740Q
R358	203X6500-666	1.2k Ohm, $\pm$ 5%, 1/8W Carbon	TR354	200X4082-614	Transistor, 2SA826Q
R359	203X6501-088	68k Ohm, $\pm$ 5%, 1/8W Carbon	X301	201X2010-144	Diode, (Si) IS2473-T72
R360	203X5500-471	27 Ohm, $\pm$ 5%, 1/4W Comp.	X302	201X2010-144	Diode, (Si) IS2473-T72
R361	203X6000-998	1.2k Ohm, $\pm$ 5%, 1/8W Carbon	X303	200X8000-026	Diode, (GE) IN60TVGL
R363	203X6500-666	1.2k Ohm, $\pm$ 5%, 1/8W Carbon	X304	200X8010-165	Diode (Si) ISS81
R364	203X9014-988	47k Ohm, $\pm$ 5%, 1W M.O.	X305	201X2010-165	Diode (Si) ISS81
R365	203X6700-989	56k Ohm, $\pm$ 5%, 1/2W Carbon	X306	201X2010-165	Diode (Si) ISS81
R366	203X6001-148	3.3k Ohm, $\pm$ 5%, 1/8W Carbon	X307	200X8010-102	Diode (Si) MA26W
R367	340X2222-734	2.2k Ohm, $\pm$ 5%, 1/2W Carbon	X308	200X8010-094	Diode (Si) IS2473
R368	203X6500-785	3.9k Ohm, $\pm$ 5%, 1/8W Carbon	X351	201X2010-144	Diode (Si) IS2473-T72
R369	203X6500-762	3.3k Ohm, $\pm$ 5%, 1/4W Carbon	X352	201X2010-144	Diode (Si) IS2473-T72
R370	302X6100-961	1k Ohm, $\pm$ 5%, 1/4W Carbon	X353	201X2010-144	Diode (Si) IS2473-T72
R371	203X6104-751	2.7k Ohm, $\pm$ 5%, 1/4W Carbon	X354	201X2010-144	Diode (Si) IS2473-T72
VR301	204X2122-093	Varistor, 250K Ohm, Vert. Hold	X355	200X8220-851	Diode (Zener) RD10EBI
VR302	204X2114-065	Varistor, 20K Ohm, Vert. Size	X366	200X8100-130	Diode (HS) RU-1 0.3 US
VR351	204X2114-059	Varistor, 50K Ohm, Hor. Hold			

CAPACITORS

C301	203X1100-928	0.15 uF, 50V, $\pm$ 10% Mylar
C302	203X1100-573	0.022 uF, 50V, $\pm$ 10% Mylar
C304	203X1100-858	0.1 uF, 50V, $\pm$ 10% Mylar
C306	203X0025-026	2.2 uF, 50V, Electrolytic
C307	203X1100-928	0.15 uF, 50V, $\pm$ 10% Mylar
C309	203X1100-858	0.1 uF, 50V, $\pm$ 10% Mylar
C310	203X0010-011	22 uF, 16V Electrolytic
C311	203X0020-099	1000 uF, 35V Electrolytic
C312	202X7000-469	0.0082 uF, 50V, $\pm$ 10% Ceramic

POWER BOARD (MV)

RESISTORS

R501	204X1725-052	180 Ohm, $\pm$ 10%, 15W WW
R502	203X6000-608	100 Ohm, $\pm$ 5%, 1/8W Carbon
R503	203X6000-960	1k Ohm, $\pm$ 5%, 1/8W Carbon
R504	203X6000-879	560 Ohm, $\pm$ 5%, 1/8W Carbon
R505	203X9014-965	39k Ohm, $\pm$ 5%, 1W M.O.
R506	203X6500-842	6.8k Ohm, $\pm$ 5%, 1/8W Carbon
R551	203X6500-420	120 Ohm, $\pm$ 5%, 1/8W Carbon
VR501	204X2050-001	Varistor Vert. Adj.

CAPACITORS

C501	203X0040-020	10 uF, 160V Electrolytic
C502	202X7000-281	1500 pF, 50V, $\pm$ 10% Ceramic

MISCELLANEOUS

J301	204X9300-958	Socket, 6 Pin
J302	204X9300-958	Socket, 6 Pin
P301	204X9601-195	Plug, 6 Pin
P302	204X9601-195	Plug, 6 Pin
TH301	201X0000-534	Thermistor

TRANSFORMERS & COILS

L351	201X5200-091	Coll, Horiz. Osc.
------	--------------	-------------------

SEMICONDUCTORS

TR501	200X3174-006	Transistor, 2SC1740Q
TR502	200X3145-404	Transistor, 2SC1454
TR551	200X3172-305	Transistor, 2SC1723
X501	201X2230-042	Diode, (Si) Zener EQB01-06V
X502	201X2010-144	Diode, (Si) IS2473-T72

MISCELLANEOUS

J501	204X9300-958	Socket, 6 Pin
P501	204X9601-195	Plug, 6 Pin
TH501	201X0000-618	Thermistor

NECK BOARD (MS/QG)

Ref. No.	Part No.	Description	Ref. No.	Part No.	Description
RESISTORS			SEMICONDUCTORS		
R401	203X6500-709	1.8k Ohm $\pm$ 5% 1/8W Carbon	C403	202X7000-247	1000 pF, 50V, 10% Ceramic
R402	203X6500-709	1.8k Ohm $\pm$ 5% 1/8W Carbon	C404	202X7110-019	1500 pF, 2kV $\pm$ 10% Ceramic
R403	203X6500-709	1.8k Ohm $\pm$ 5% 1/8W Carbon	C405	202X7150-018	100 pF, 12kV, $\pm$ 10% Ceramic
R404	203X6500-447	150 Ohm $\pm$ 5% 1/8W Carbon	C406	202X7050-483	.01 uF, 500V, $\pm$ 10% Ceramic
R405	203X6500-481	220 Ohm $\pm$ 5% 1/8W Carbon	C407	202X7110-019	1500 pF, 2kV $\pm$ 10% Ceramic
R406	203X6500-447	150 Ohm $\pm$ 5% 1/8W Carbon	C408	202X8000-550	68 pF, 50V, $\pm$ 10% Ceramic
R407	203X6500-508	270 Ohm $\pm$ 5% 1/8W Carbon	C409	202X8000-550	68 pF, 50V, $\pm$ 10% Ceramic
R408	203X6500-508	270 Ohm $\pm$ 5% 1/8W Carbon	C410	202X8000-550	68 pF, 50V, $\pm$ 10% Ceramic
R409	203X6500-800	4.7k Ohm $\pm$ 5% 1/8W Carbon			
R410	203X6500-800	4.7k Ohm $\pm$ 5% 1/8W Carbon			
R411	203X6500-800	4.7k Ohm $\pm$ 5% 1/8W Carbon			
R412	203X9104-809	12k Ohm $\pm$ 5% 2.0W Metal Oxide			
R413	203X9104-809	12k Ohm $\pm$ 5% 2.0W Metal Oxide			
R414	203X9104-809	12k Ohm $\pm$ 5% 2.0W Metal Oxide			
R415	203X5601-313	2.7k Ohm $\pm$ 10% 1/2W Comp.	TR401	200X3206-800	Transistor, 2SC2068, 2SC1514 (F output)
R416	203X5601-313	2.7k Ohm $\pm$ 10% 1/2W Comp.	TR402	200X3206-800	Transistor, 2SC2068, 2SC1514 (G output)
R417	203X5601-313	2.7k Ohm $\pm$ 10% 1/2W Comp.	TR403	200X3206-800	Transistor, 2SC2068, 2SC1514 (B output)
R418	203X5602-254	470k Ohm $\pm$ 10% 1/2W Comp.			
R419	203X5602-185	330k Ohm $\pm$ 10% 1/2W Comp.			
R422	203X9105-117	1.0 Ohm $\pm$ 10% 2W Metal Oxide			
R423	203X5102-155	270k Ohm $\pm$ 5% 1/4W Carbon			
VR401	204X2115-014	500 Ohm Varistor R Drive	X404	201X2100-126	Diode, IS2367 (protector)
VR402	204X2115-014	500 Ohm Varistor R Drive	X405	201X2100-126	Diode, IS2367 (protector)
VR403	204X2115-006	5k Ohm Varistor B Cutoff	X406	201X2100-126	Diode, IS2367 (protector)
VR404	204X2115-006	5k Ohm Varistor G Cutoff			
VR405	204X2115-006	5k Ohm Varistor B Cutoff			
VR406	204X2000-025	1M Ohm Varistor Screen			

CAPACITORS

C401	202X7000-247	1000 pF, 50V, 10% Ceramic
C402	202X7000-247	1000 pF, 50V, 10% Ceramic

★ 297X2000-072 HIGH VOLTAGE ASSEMBLY (T701)

★ R701	204X1625-058	3.3 Ohm, $\pm$ 10% 10W WW Resistor
VR702	204X3901-125	Focus Control
X701		Diode (Si HV)
X702		Diode (Si HV)
X703		Diode (Si HV)

INTERFACE BOARD (P305)
(MODEL 19K4606)

RESISTORS

R201	340X3910-934	91 Ohm, 5%, 1/2W Carbon
R203	340X3102-934	1k Ohm, 5%, 1/2W Carbon
R204	340X2101-934	100 Ohm, 5%, 1/4W Carbon
R206	340X3331-944	330 Ohm, 10%, 1/2W Carbon
R207	340X3102-934	1k Ohm, 5%, 1/2W Carbon
R208	340X3152-934	1.5k Ohm, 5%, 1/4W Carbon
R209	340X2101-934	100 Ohm, 5%, 1/4W Carbon
R210	340X3102-934	1k Ohm, 5%, 1/2W Carbon
R211	340X2331-934	330 Ohm, 5%, 1/4W Carbon
R212	340X2331-934	330 Ohm, 5%, 1/4W Carbon
R213	340X2331-934	330 Ohm, 5%, 1/4W Carbon
R214	340X2201-934	200 Ohm, 5%, 1/4W Carbon
R215	340X2201-934	200 Ohm, 5%, 1/4W Carbon
R216	340X2201-934	200 Ohm, 5%, 1/4W Carbon
VR201	40X0590-017	1.5k Ohm, Black Level Control

CAPACITORS

C201	45X0524-038	1000 uF, 16V Electrolytic
------	-------------	---------------------------

MISCELLANEOUS

J401	206X5003-729	Socket, 5 Pin
J402	206X5003-983	Socket, 3 Pin
P401	204X9600-329	Plug, 5 Pin
P402	204X9600-254	Plug, 3 Pin

FINAL ASSEMBLY PARTS


★ 88X-0129-506	19VJTP22 Pix Tube
38A5554-000	Assy. Purity Shld/Degaussing
205X9800-256	Lateral/Purity Assembly
★ 202X1110-810	Yoke, Deflection
208X2000-946	CRT Socket
297X2000-072	HV Unit (T701)
6A0397	Plug, Line Cord
9A2753-003	Degaussing Coil (L701)

SEMICONDUCTORS

TR201	86X0121-001	Transistor (NPN)
TR202	86X0121-001	Transistor (NPN)
TR203	86X0121-001	Transistor (NPN)
TR204	86X0066-001	Transistor (PNP)
TR205	86X0066-001	Transistor (PNP)
TR206	86X0066-001	Transistor (PNP)
TR207	86X0121-001	Transistor (NPN)
TR208	86X0121-001	Transistor (NPN)
TR209	86X0121-001	Transistor (NPN)
ZD201	66X0040-018	Diode, Zener, 6.8v, 5%, 0.5W
ZD202	66X0040-019	Diode, Zener, 3.9v, 5%, 0.5W

MISCELLANEOUS

J201	204X9300-958	Socket, 6 Pin
J202	204X9300-958	Socket, 6 Pin
J203	206X5019-207	Socket, 4 Pin
P201	204X9601-195	Plug, 6 Pin
P202	204X9601-195	Plug, 6 Pin
P203	204X9600-845	Plug, 4 Pin
P205	6A0393-006	Plug, 6 Pin

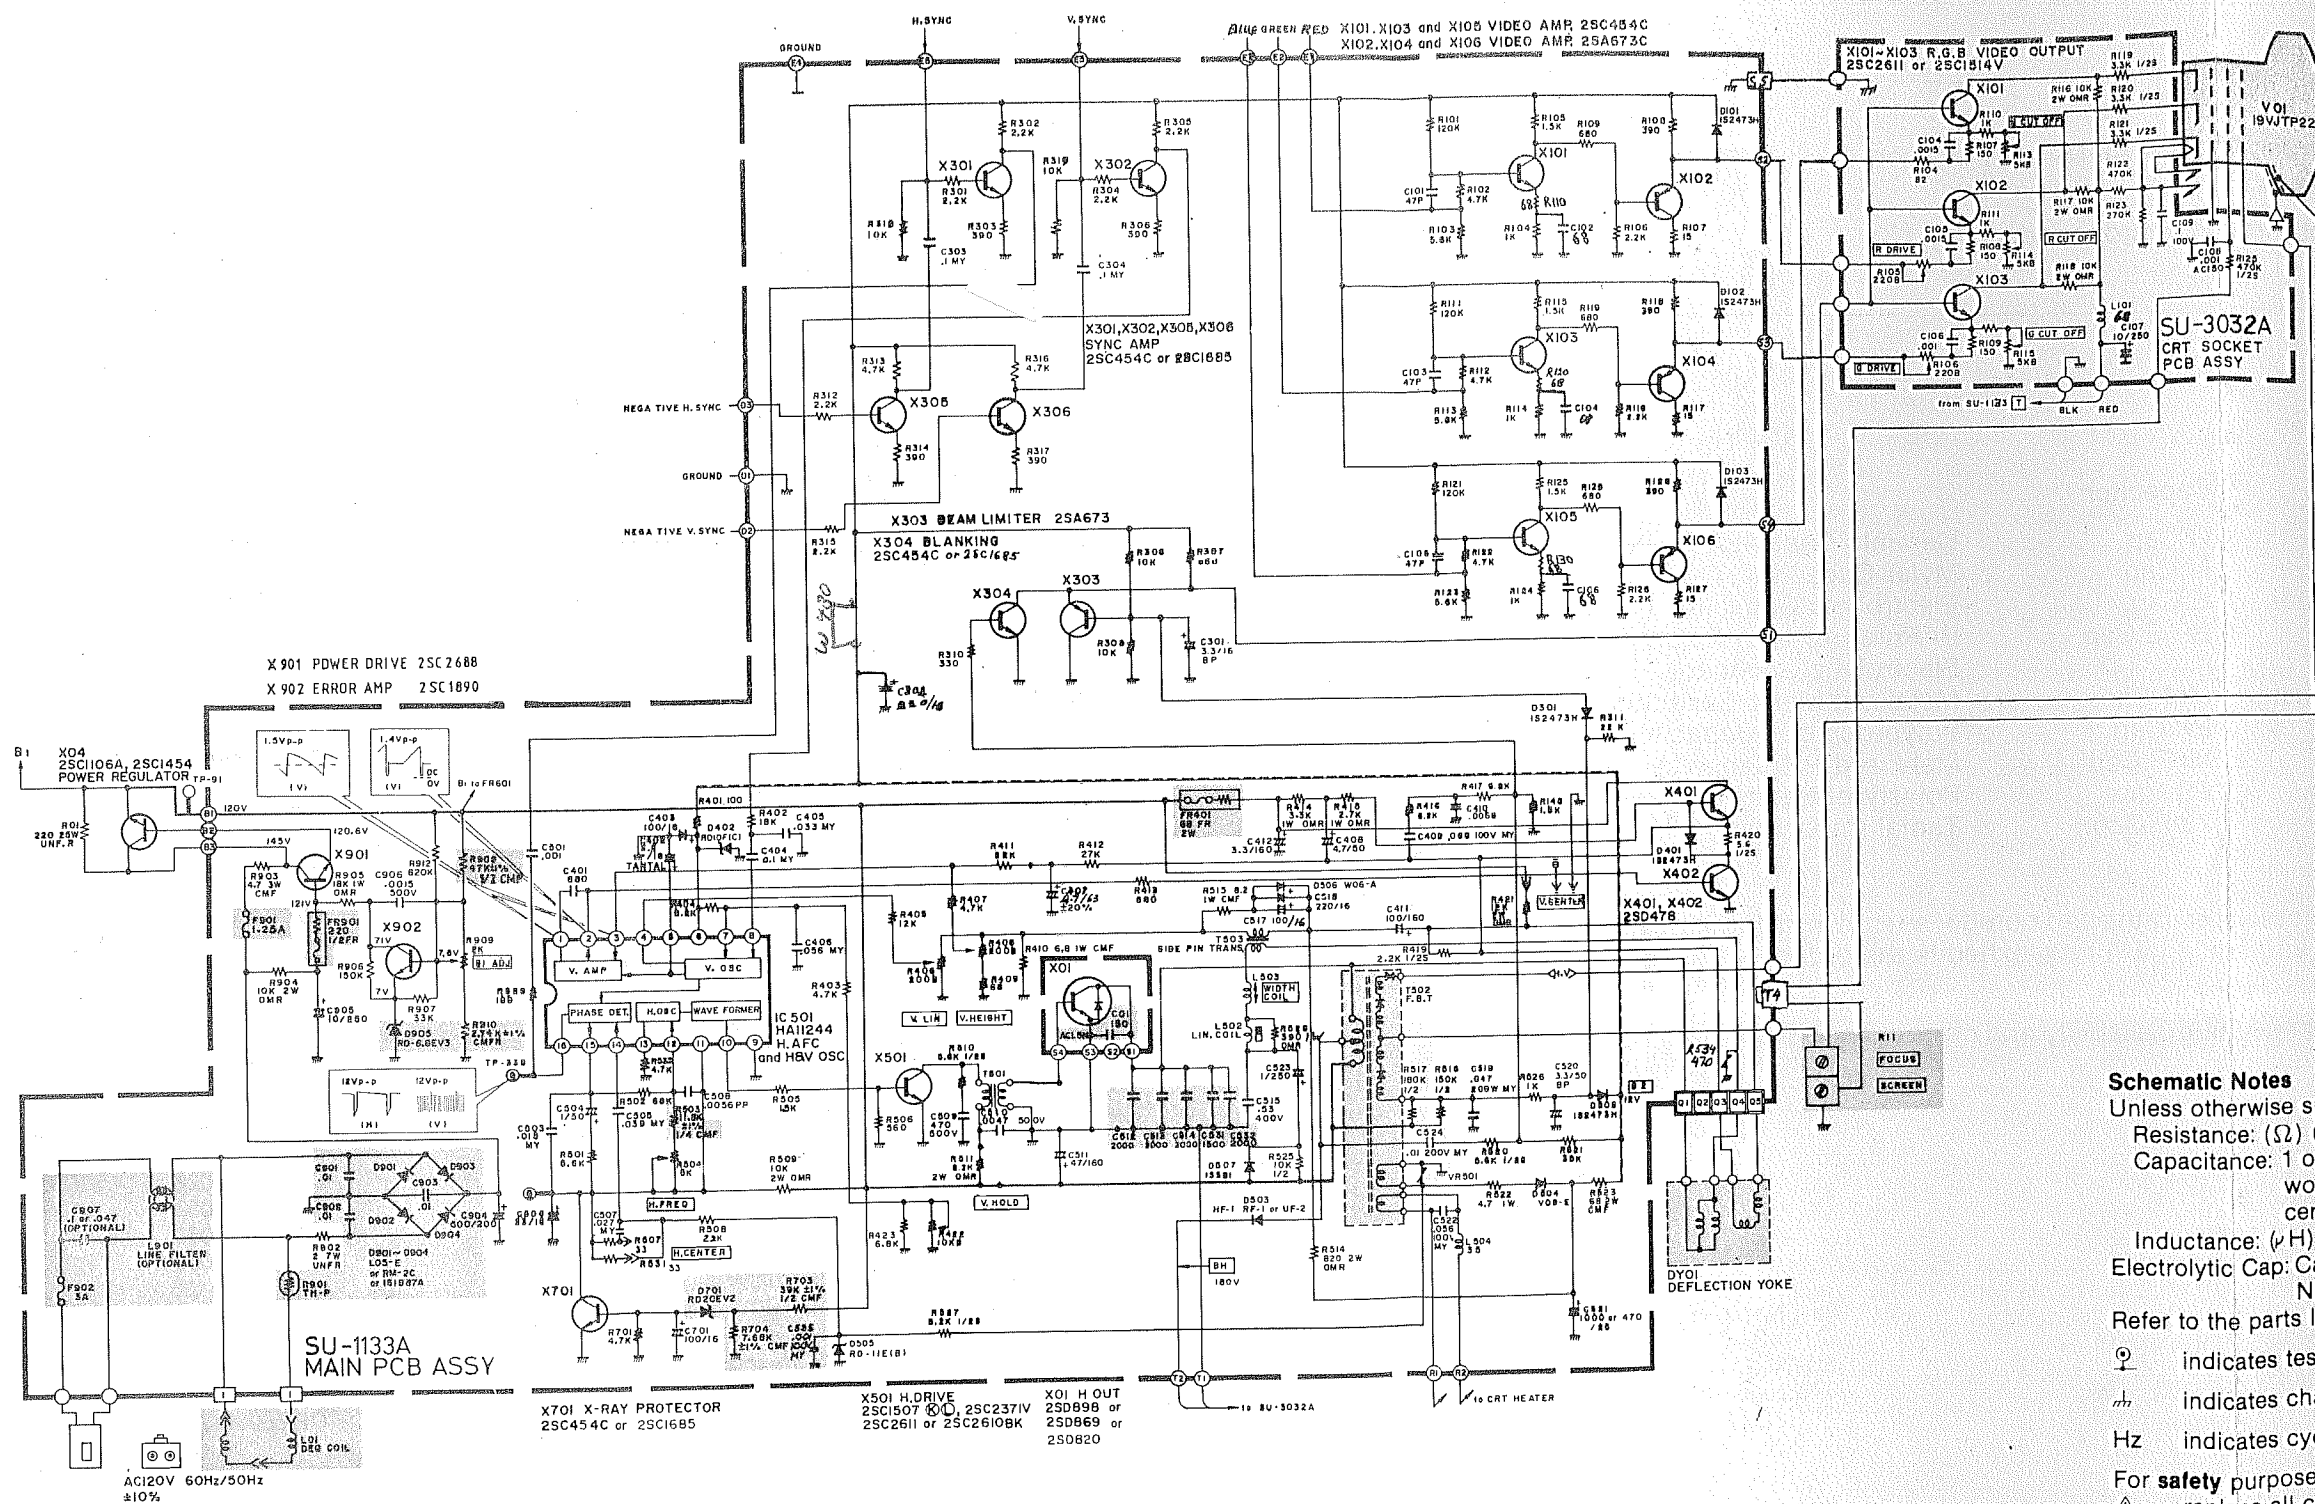

Schematic Notes

- Unless otherwise specified
- Resistance: (Ω) (K $\rightarrow$ K Ω , M $\rightarrow$ M Ω), 1/4 (W) carbon resistor
- Capacitance: 1 or higher $\rightarrow$ (pF), less than 1 $\rightarrow$ (μ F)
- working voltage $\rightarrow$ 50 (V)
- ceramic capacitor
- Inductance: (μ H)
- Electrolytic Cap: Capacitance Value (μ F)/working voltage (V),
- NP $\rightarrow$ non-polar (or bipolar) electrolytic cap.
- Refer to the parts list for additional component information.
- Ⓢ indicates test point connection
- --- indicates chassis ground unless otherwise specified
- Hz indicates cycles per second
- For safety purposes (and continuing reliability)
- $\triangle$ replace all components marked with safety symbol with identical type.
- NOTE: FR $\rightarrow$ fusible resistor (---)

00-4147-04
G07-CB0

Parts identification on circuit boards:
e.g. SU1126A (R107 = R1107)
SU3030A (R113 = R3113)

REPLACEMENT PARTS LIST - ELECTROHOME 19" MONITOR

Components identified by the Δ symbol in the PARTS LIST and on the Schematic have special characteristics important to safety.

DO NOT degrade the safety of the set through improper servicing.

Abbreviations for Resistors and Capacitors

Resistor		Capacitor	
C R	: Carbon Resistor	C Cap.	: Ceramic Capacitor
Comp. R	: Composition Resistor	M Cap.	: Mylar Capacitor
OM R	: Oxide Metal Film Resistor	E Cap.	: Electrolytic Capacitor
V R	: Variable Resistor	BP E Cap.	: Bi-Polar (or Non-Polar) Electrolytic Capacitor
MF R	: Metal Film Resistor	MM Cap.	: Metalized Mylar Capacitor
CMF R	: Coating Metal Film Resistor	PP Cap.	: Polypropylene Capacitor
UNF R	: Nonflammable Resistor	MPP Cap.	: Metalized PP Capacitor
F R	: Fusible Resistor	PS Cap.	: Polystyrol Capacitor
		Tan. Cap.	: Tantal Capacitor

NOTE: When ordering replacement parts please specify the part number as shown in this list including part name, and model number. Complete information will help expedite the order.

Use of substitute replacement parts which do not have the same safety characteristics as specified, may create shock, fire or other hazards. For maximum reliability and performance, all parts should be replaced by those having identical specifications.

SERVICE REPLACEMENT PARTS LIST

Symbol	Description	Part Number
	Main P.C.B. Ass'y	SU-1133A
	CRT Socket P.C.B. Ass'y	SU-3032A
	Purity Shield Ass'y	07-220083-03

Outside of the P.C.B. Ass'y

Symbol	Description	Part Number
Δ	Picture Tube 19"	17-7198-03
Δ	Deflection Yoke	A29779-D = 21-141-01
Δ	PC Magnet	A75034-B = 29-32-01
Δ	Flyback Transf.	A29951-B
Δ	HVR	A46600-A
R05	UNF Resistor 220 Ω , 25W K	QRF258K-221
C04	C Capacitor 150pF, AC1.5KV	QCZ0101-005
X01	Si. Transistor	2SD870
X02	Si. Transistor	2SC1106A
SC	Screw #8- $\frac{3}{8}$	31-610818-06
SC	Screw $\frac{1}{4}$ x $\frac{3}{4}$ Pix Tube Mtg. (4)	31-601418-12
WA	Pyramidal Lock Washer (4)	33-255-01
	Nut Retainer, Pix Tube Mtg. (4)	33-494-01
	Clip — P.C.B. Support	33-629-02
	Standoff	33-670-010R-02
	Wire Terminal (Gnd. Strap)	34-228-03
	Terminal Lug (Gnd.)	34-33-04
	Groundstrap Assy.	34-574-02
	Grounding Spring	35-212-03
	Wire Hook (Gnd. Strap)	35-3053-02
	Purity Shield Holddown Clamp	35-2348-01
	Support Brkt. RH	35-3890-01
	Support Brkt. LH	35-3890-02
	Chassis Base	38-449-02
	Yoke Wedge (3)	39-1233-01

Purity Shield Ass'y. Parts List

Symbol	Description	Part Number
D911, D912	Degaussing Coil	21-1007-30
	Rectifier 1 Amp 600V (2)	28-22-27
	Pin Terminal (2)	34-708-01
	Pin Terminal Housing	34-709-01
	Purity Shield (2 pcs.)	35-3847-01
	Purity Shield (2 pcs.)	35-3847-02
C911	Capacitor 100nF 10% 400V	48-171544-62
R921	Resistor, Wirewound 33 Ω , 4W	42-113301-03
	Fire Retardent Term. Strip 4 Lug	34-492-09

CRT Socket P.C.B. Ass'y (SU-3032A) Parts List

Resistors	Description	Part Number
Symbol		
R3105	V R 200	QVZ3234-022
R3106	V R 200	QVZ3234-022
R3113	V R 5K	QVZ3234-053
R3114	V R 5K	QVZ3234-053
R3115	V R 5K	QVZ3234-053
R3116	OM R 10K Ω 2W J	QRG029J-103
R3117	OM R 10K Ω 2W J	QRG029J-103
R3118	OM R 10K Ω 2W J	QRG029J-103
R3119	Comp. R 3.3K Ω $\frac{1}{2}$ W K	QRZ0039-332
R3120	Comp. R 3.3K Ω $\frac{1}{2}$ W K	QRZ0039-332
C3121	Comp. R 3.3K Ω $\frac{1}{2}$ W K	QRZ0039-332

Capacitors	Description	Part Number
Symbol		
C3107	E Cap. 10uF 250V A	QEW53EA-106
C3108	C Cap. 1000pF DC1400V P	QCZ9001-102M

Coils	Description	Part Number
Symbol		
L3101	Peaking Coil	QQL043K-101

Semiconductors		
Symbol	Description	Part Number
X3101	Si. Transistor	2SC1514VC
X3102	Si. Transistor	2SC1514VC
X3103	Si. Transistor	2SC1514VC
Miscellaneous		
Symbol	Description	Part Number
△	△CRT Socket	A76068

Main PCB Ass'y (SU-1133A) Parts List

Resistors			
Symbol	Description		Part Number
R1406	V R 200Ω		QVZ3230-002
R1408	V R 200Ω		QVZ3230-002
R1410	CMF R 6.8Ω1W J		QRX019J-6R8
R1414	OM R 3.3KΩ1W J		QRG019J-332
R1415	OM R 2.7KΩ1W J		QRG019J-272
R1421	OM R 12KΩ2W J		QRG026J-123Z
R1422	V R 10KΩ		QVZ3230-014
△FR1401	△F R 68Ω2W K		QRH024K-680M
△R1503	△CMF R 11.8KΩ¼W +1%		QVR142F-1182
R1504	V R 5KΩ		QVZ3230-053
R1509	OM R 10KΩ2W J		QRG026J-103Z
R1512	OM R 8.2KΩ2W J		QRG026J-822Z
R1514	OM R 820Ω2W J		QRG026J-821Z
R1515	CMF R 8.2Ω1W J		QRX019J-8R2
R1522	CMF R 4.7Ω1W J		QRX019J-4R7
R1523	OM R 68Ω2W J		QRG026J-680Z
R1528	OM R 390Ω1W J		QRG019J-391
R1534	ZN R		ERZ-C05ZK471
VR1501	ZN R		ERZ-C05DK271
△R1703	△CMF R 39Ω½W +1%		QRV122F-3902
△R1704	△CMF R 7.68KΩ¼W +1%		QRV142F-7681
△R1901	△Posistor		A75414
R1902	UNF R 2Ω7W K		QRF076K-2R0
R1903	CMF R 4.7Ω3W J		QRX039J-4R7
R1904	OM R 10KΩ2W J		QRG026J-103Z
R1905	OM R 18KΩ1W J		QRG019J-183
△Q1908	△CMF R 47Ω½W +1%		QRV122F-470Z
△R1909	V R 2KΩ		QVP5A0B-023E
R1910	△CMF R 2.74KΩ¼W +1%		QVR142F-274I
△FR1901	△F R 220Ω½W K		QRH124K-221M
Capacitors			
Symbol	Description		Part Number
C1301	BPE Cap. 3.3uF 50V A		QEN61HA-335Z
C1402	Tan. Cap. 2.2uF 16V K		QEE51CK-225B
C1407	E Cap. 4.7uF 6.3V A		QEW51JA-475
C1411	E Cap. 100uF 160V A		QEW52CA-107
C1412	E Cap. 3.3uF 160V A		QEW52CA-335
C1508	PP Cap. 5600uF 50V J		QFP31HJ-562
△C1512	△PP Cap. 2000pF DC1500V J		QFZ0082-202
△C1513	△PP Cap. 2000pF DC1500V J		QFZ0082-202
△C1514	△PP Cap. 2000pF DC1500V J		QFZ0082-202
C1515	PP Cap. 0.53uF DC1200V J		QFZ0067-534
C1520	BPE Cap. 3.3uF 50V A		QEN61HA-335Z
C1523	E Cap. 1uF 160V A		QEW62CA-105Z
C1524	M Cap. 0.1uF 200V K		QFM720K-104M
△C1531	△PP Cap. 2000pF DC1500V J		QFZ0082-202
△C1532	△PP Cap. 1500pF DC1500V J		QFZ0082-152
C1904	E Cap.		QEY0034-001
C1905	E Cap. 10uF 250V A		QEW52EA-106

Coils
Symbol
L1502
L1503
L1504

Description
Linarity Coil
Width Coil
Heater Choke

Part Number
A39835
C30380-A
C30445-A

Transformers
Symbol
T1501
T1503

Description
Hor. Drive Transf.
Side Pin Transf.

Part Number
A46022-BM
C39050-A

Semiconductors
Symbol
IC1501

Description
IC

Part Number
HA11244

X1101
X1102
X1103
X1104
X1105
X1106
X1301
X1302
X1303
X1304
X1305
X1401
X1402
X1501
X1901
X1902

Si. Transistor
Si. Transistor
Si. Transistor
Si. Transistor
Si. Transistor
Si. Transistor
Si. Transistor
Si. Transistor
Si. Transistor
Si. Transistor
Si. Transistor
Si. Transistor
Si. Transistor
Si. Transistor
Si. Transistor
Si. Transistor

2SC1685(R)
2SA673(C)
2SC1685(R)
2SA673(C)
2SC1685(R)
2SA673(C)
2SC1685(R)
2SC1685(R)
2SA673(C)
2SC1685(R)
2SC1685(R)
2SD478
2SD478
2SC2610BK
2SC2688 (K.L.M.)
2SC1890A (E.F.)

D1101
D1102
D1103
D1301
D1401
D1402

Si. Diode
Si. Diode
Si. Diode
Si. Diode
Si. Diode
Zener Diode

W06A
W06A
W06A
1SZ473H
1SZ473H
RD10F(C)

D1503
D1504
D1505
D1506
D1507
D1508

Si. Diode
Si. Diode
Zener Diode
Si. Diode
Si. Diode
Si. Diode

HF-1
V09E
RD11E(B)
W06A
1SS81
1SZ473H

△D1701
△D1901
△D1902
△D1903
△D1904
△D1905

△Zener Diode
△Si. Diode
△Si. Diode
△Si. Diode
△Si. Diode
△Zener Diode


RD20EV2
1S1887A
1S1887A
1S1887A
1S1887A
RD6.8EV3

Miscellaneous
Symbol

△F1901
△F1902

Description
△Fuse 1.25A
△UL Fuse 3A

Part Number
QMF53U1-1R25S
QMF66U1-3R0S

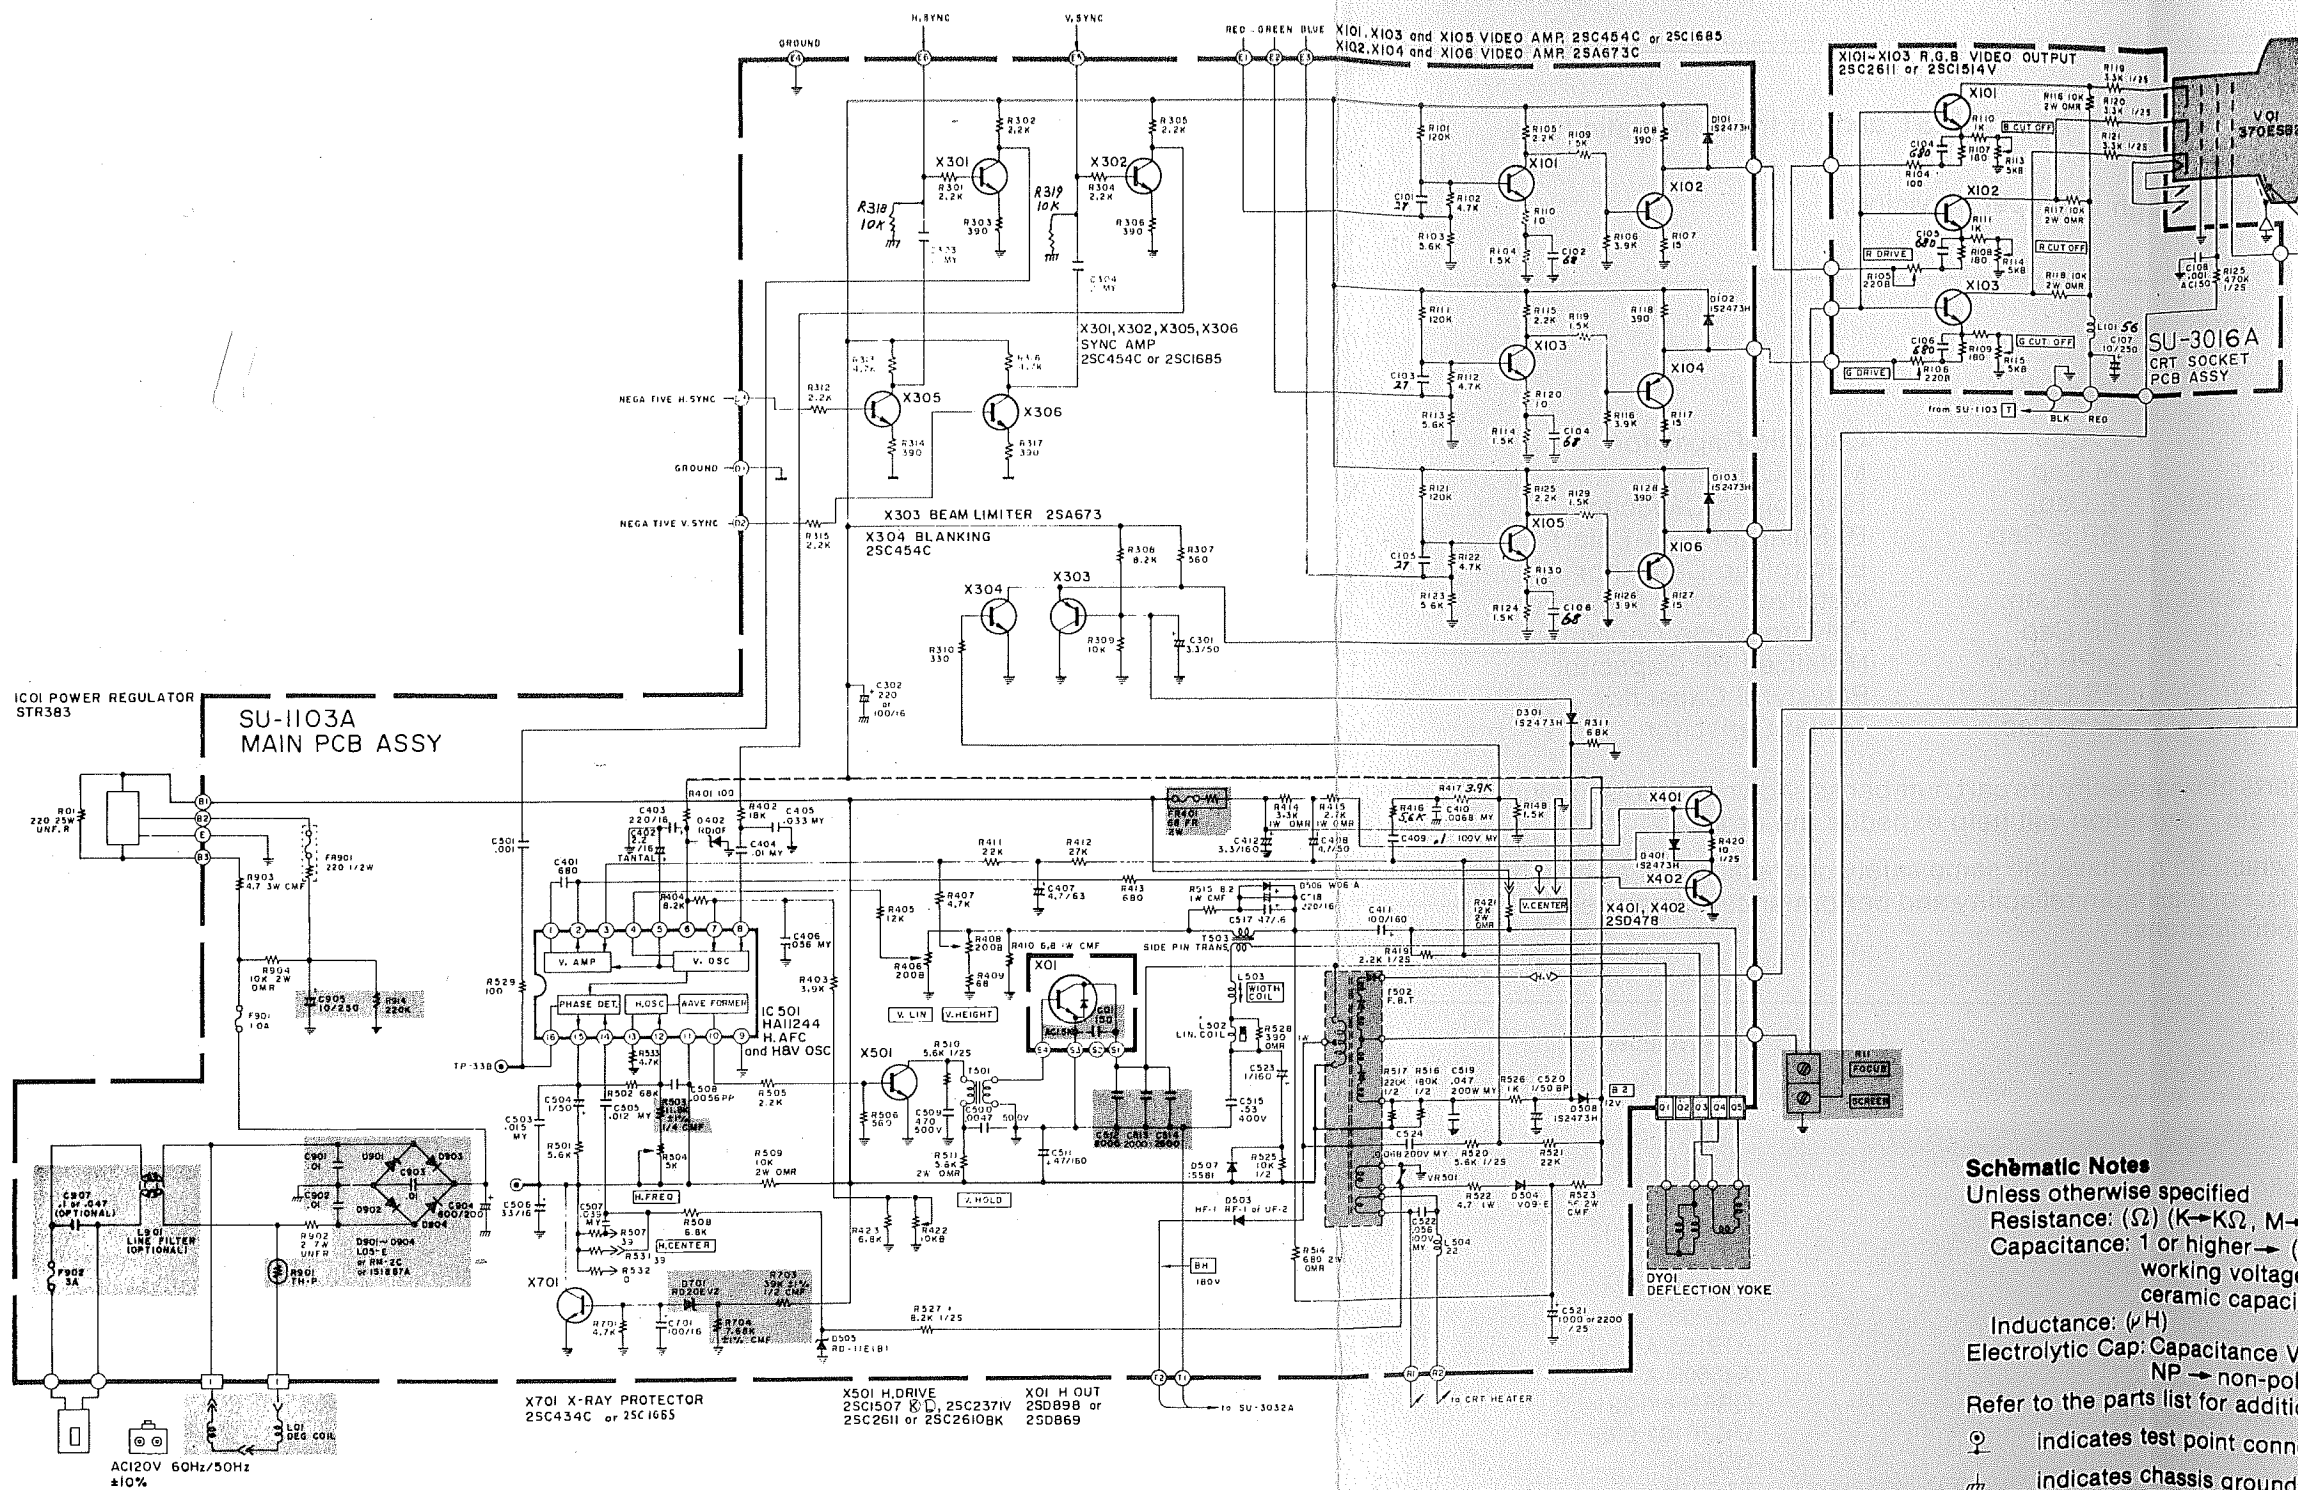

Schematic Notes

Unless otherwise specified

Resistance: (Ω) (K→KΩ, M→MΩ), 1/4 (W) carbon resistor
Capacitance: 1 or higher→ (pF), less than 1→ (μF)

working voltage→ 50 (V)
ceramic capacitor

Inductance: (μH)

Electrolytic Cap: Capacitance Value (μF)/working voltage (V),
NP→ non-polar (or bipolar) electrolytic cap.

Refer to the parts list for additional component information.

⊙ indicates test point connection

⏏ indicates chassis ground unless otherwise specified

Hz indicates cycles per second

For **safety** purposes (and continuing reliability)

△ replace all components marked with safety symbol with identical type.

NOTE: FR→ fusible resistor (—/—)

Parts identification on circuit boards:

e.g. SU1126A (R107 = R1107)

SU3030A (R113 = R3113)

REPLACEMENT PARTS LIST - ELECTROHOME 13" MONITOR

Components identified by the Δ symbol in the PARTS LIST and on the Schematic have special characteristics important to safety.
DO NOT degrade the safety of the set through improper servicing.

Abbreviations for Resistors and Capacitors

Resistor	Capacitor
C R : Carbon Resistor	C Cap. : Ceramic Capacitor
Comp. R : Composition Resistor	M Cap. : Mylar Capacitor
OM R : Oxide Metal Film Resistor	E Cap. : Electrolytic Capacitor
V R : Variable Resistor	BP E Cap. : Bi-Polar (or Non-Polar) Electrolytic Capacitor
MF R : Metal Film Resistor	MM Cap. : Metalized Mylar Capacitor
CMF R : Coating Metal Film Resistor	PP Cap. : Polypropylene Capacitor
UNF R : Nonflammable Resistor	MPP Cap. : Metalized PP Capacitor
F R : Fusible Resistor	PS Cap. : Polystyrol Capacitor
	Tan. Cap. : Tantal Capacitor

NOTE: When ordering replacement parts please specify the part number as shown in this list including part name, and model number. Complete information will help expedite the order.

Use of substitute replacement parts which do not have the same safety characteristics as specified, may create shock, fire or other hazards. For maximum reliability and performance, all parts should be replaced by those having identical specifications.

Symbol	Description	Part Number
	Main P.C.B. Ass'y	SU-1103A
	CRT Socket P.C.B. Ass'y	SU-3016A
Outside of the P.C.B. Ass'y		
Symbol	Description	Part Number
Δ V01	Δ Picture Tube	370ESB22(E)
Δ DY01	Δ Deflection Yoke	C29123-V
	PC Magnet	A76366-A
	Wedge	C30006
	Δ Flyback Transf.	A19183-A
Δ R11	Δ Focus V R	A46606-A
Δ R05	UNF Resistor 220 Ω , 25W. K	QRF258K-221
Δ C04	Δ C Capacitor 150 pF, AC1.5KV	QCZ0101-005
X01	Si. Transistor	2SD869
IC01	IC Regulator	STR383
L01	Degaussing Coil	21-1007-31
	Degaussing Coil Pin Terminal (2)	34-708-01
	Degaussing Coil Pin Terminal Housing	34-709-01
	Groundstrap Ass'y.	34-697-04
	Groundstrap Wire Terminal	34-228-03
	Groundstrap Spring (2)	35-3560-01
BR	Support Bracket RH	35-3919-01
BR	Support Bracket LH	35-3919-02
SC	SCREW 10- $\frac{1}{2}$ Pix Tube Mtg. (4)	31-631018-08
WA	Pyramidal Lockwasher (4)	33-255-01
	Clip P.C.B. Support (2)	33-629-02
	Ground Lug	34-33-04
CH	Chassis Base	38-452-01

Main P.C.B. Ass'y (SU-1103A) Parts List

Resistors	Description	Part Number
Symbol		
R1406	V R 200 Ω	QVZ3230-022
R1408	V R 200 Ω	QVZ3230-022
R1410	CMF R 6.8 Ω 1W J	QRX019J-6R8
R1414	OM R 3.3K Ω 1W J	QRG019J-332
R1415	OM R 2.7K Ω 1W J	QRG019J-272
R1421	OM R 12K Ω 2W J	QRG029J-123
R1422	V R 10K Ω	QVZ3224-014H
Δ FR1401	Δ F R 68 Ω 2W K	QRH024K-680M
Δ R1503	Δ CMF R 11.8K Ω $\frac{1}{4}$ W +1%	QRV142F-1182
R1504	V R 5K Ω	QVZ3230-053
R1509	OM R 10K Ω 2W J	QRG029J-103
R1511	OM R 5.6K Ω 2W J	QRG029J-562
R1514	OM R 680 Ω 2W J	QRG029J-681
R1515	CMF R 8.2 Ω 1W J	QRX019J-8R2
R1522	CMF R 4.7 Ω 1W J	QRX019J-4R7
R1523	OM R 56 Ω 2W J	ORG029J-560
R1528	OM R 390 Ω 1W J	ORG019J-391
R1534	ZN R	ERZ-C05ZK471
VR1501	ZN R	ERZ-C05DK271
Δ R1703	Δ CMF R 39K Ω $\frac{1}{2}$ W +1%	QRV122F-3902
Δ R1704	Δ CMF R 7.68K Ω $\frac{1}{4}$ W +1%	QRV142F-7681
Δ R1901	Δ Posistor	A75414
R1902	UNF R 2 Ω 7W K	QRF076K-2R0
R1903	CMF R 5.6 Ω 3W J	QRX039J-5R6
R1904	OM R 10K Ω 2W J	QRG026J-103Z
Δ FR1901	Δ F R 220 Ω $\frac{1}{2}$ W K	QRH124K-221M
Capacitors	Description	Part Number
Symbol		
C1402	Tan. Cap. 2.2uF 16V K	QEE51CK-225B
C1411	E Cap. 100uF 160V A	QEW52CA-107
C1412	E Cap. 3.3uF 160V A	QEW52CA-335
C1508	PP Cap. 5600pF 50V J	QFP31HJ-562
C1511	E Cap. 47uF 160V A	QEW52CA-476S
Δ C1512	Δ PP Cap. 2000pF DC1500V J	QFZ0082-202
Δ C1513	Δ PP Cap. 2000pF DC1500V J	QFZ0082-202
Δ C1514	Δ PP Cap. 2500pF DC1500V J	QFZ0082-252
C1515	PP Cap. 0.53uF DC1200V K	QFZ0067-534
C1520	BPE Cap. 1uF 50V A	QEN61HA-105Z
C1524	M Cap. 0.1uF 200V K	QFM72DK-682M
C1904	E Cap.	QEY0034-001
C1905	E Cap. 10uF 250V A	QEW52EA-106
Δ C1907	Δ MM Cap. 0.1uF AC150V Z	QFZ9008-104
Coils	Description	Part Number
Symbol		
L1501	Peaking Coil	A75360-6
L1502	Liniarty Coil	A39934
L1503	Width Coil	C30380-A
L1504	Heater Choke	C30333-A
L1901	Line Filter	A39475-J
Transformers	Description	Part Number
Symbol		
T1501	Hor. Drive Transf.	A46022-BM
T1503	Side Pin Transf.	C39050-A

Semiconductors			
Symbol	Description		Part Number
IC1501	I.C.		HA11244
X1101	Si. Transistor		2SC1685(R)
X1102	Si. Transistor		2SA673(C)
X1103	Si. Transistor		2SC1685(R)
X1104	Si. Transistor		2SA673(C)
X1105	Si. Transistor		2SC1685(R)
X1106	Si. Transistor		2SA673(C)
X1301	Si. Transistor		2SC1685(R)
X1302	Si. Transistor		2SC1685(R)
X1303	Si. Transistor		2SA673(C)
X1304	Si. Transistor		2SC1685(R)
X1305	Si. Transistor		2SC1685(R)
X1401	Si. Transistor		2SD478
X1402	Si. Transistor		2SD478
X1501	Si. Transistor		2SC2610BK
X1701	Si. Transistor		2SC1685(P-S)
D1101	Si. Diode		W06A
D1102	Si. Diode		W06A
D1103	Si. Diode		W06A
D1301	Si. Diode		1S2473H
D1401	Si. Diode		1S2473H
D1402	Zener Diode		RD10F(C)
D1503	Si. Diode		HF-1
D1504	Si. Diode		V09E
D1505	Zener Diode		RD11E(B)
D1506	Si. Diode		W06A
D1507	Si. Diode		1SS81
D1508	Si. Diode		1S2473H
△D1701	△Zener Diode		RD20EV2
△D1901	△Si. Diode		1S1887A
△D1902	△Si. Diode		1S1887A
△D1903	△Si. Diode		1S1887A
△D1904	△Si. Diode		1S1887A
Miscellaneous			
Symbol	Description		Part Number
△F1901	△Fuse 1A		QMF53U1-1R0S
△F1902	△UL Fuse 3A		QMF66U1-3R0S

CRT Socket P.C.B. Ass'y (SU-3016A) Parts List

Resistors		
Symbol	Description	Part Number
R3105	V R 200Ω	QVZ3234-022
R3106	V R 200Ω	QVZ3234-022
R3113	V R 5KΩ	QVZ3234-053
R3114	V R 5KΩ	QVZ3234-053
R3115	V R 5KΩ	QVZ3234-053
R3116	OM R 10KΩ2W J	QRG029J-103
R3117	OM R 10KΩ2W J	QRG029J-103
R3118	OM R 10KΩ2W J	QRG029J-103
R3119	Comp. R 3.3KΩ½W K	QRZ0039-332
R3120	Comp. R 3.3KΩ½W K	QRZ0039-332
R3121	Comp. R 3.3KΩ½W K	QRZ0039-332
Capacitors		
Symbol	Description	Part Number
C3107	E Cap. 10uF 250V A	QEW52EA-106
C3108	C Cap. 1000pF DC1400V P	QCZ9001-102M
Coils		
Symbol	Description	Part Number
L3101	Peaking coil	QQL043K-101
Semiconductors		
Symbol	Description	Part Number
X3101	Si. Transistor	2SC2611
X3102	Si. Transistor	2SC2611
X3103	Si. Transistor	2SC2611
Miscellaneous		
Symbol	Description	Part Number
△	△ CRT Socket	A75522